



SIGHTWARD S800

User Manual

Thank you for purchasing LumenTac. We are committed to product quality and friendly customer service. If you have any question or suggestion, please don't hesitate to contact us at support@lumentac.com.

DANGER

- DO NOT throw the light directly into human eyes. This may cause temporary blindness, or permanent damage to the eyes.
- DO NOT cover the light head, or place the light head down on the ground when the light is on. The radiation energy of the light may cause damage to the light itself, or even result in burning to other materials.
- DO NOT leave the light in any type of fabric bag or fusible plastic container under high temperature.

WARNING

Keep out of reach of children.

NOTICE

- The two switches can only be activated by pressing inwards from the side(s). Pushing forward or downward of the switch will not activate the light.
- Fully charge the battery before storing the light for a long period of time.
- Please keep the charging port clean. Wipe any dust off before charging.
- The LED light will work for one minute at the top output mode and gradually step down to 300 lumens within 90 seconds.
- Always attach the light on the rail could better protect the switch and avoid damage caused by falling.

EXCLUSION CLAUSE

LumenTac is not liable for damages or injuries sustained resulting from the usage of the product inconsistent with the warnings in the manual, including but not limited to the usage of the product not as recommended.

PRODUCT CONTENTS



Sightward S800



Charging Cable



Allen Wrench



Adapter and Screws



Manual



Box

SPECIFICATIONS

Material:6061-T6 aluminum alloy, Type anodizing .



800Lumens



90m / 295ft



65Minutes



OSRAM
KW CSLNM1.TG



2025 cd



1m / 3.28ft



IP65



53g/
0.11lb
Built-in battery




2.04x1.2x1.02inch

FIREARM COMPATIBILITY CHECK

The Sightward S800 can be used on most firearms using a Glock or Picatinny (mil-std-1913) type rail. The Glock adapter labeled GB is already installed (compatible with most Glock handguns) and a Picatinny (mil-std-1913) adapter included in the packaging. For firearms using Picatinny (mil-std-1913) rails, the user needs to replace the GB adapter with the included 1913 adapter using the screws and socket head wrench provided in the package.

PRODUCT OVERVIEW

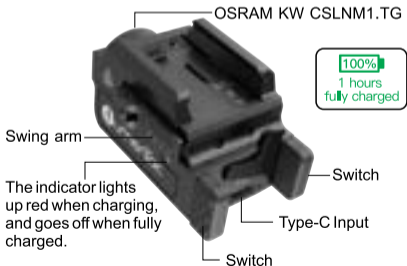

LIGHT INSTALLATION

- (1) Use the included Allen wrench to ensure that the two socket screws are tight.
- (2) Pull open the swing arm.
- (3) Position the Glock rail adapter (already installed) or Picatinny rail adapter (to be installed first) to the desired rail notch and then close the swing arm.



(1)



(2)



(3)

SWITCH OPERATION

- The ambidextrous switch on the Sightward S800 can only be pressed inwards to activate the light. Pressing the front or down of the switch will not turn it on.
- **TURN ON/OFF:** Single click either side of the tail switch for constant on. Single click again to turn the light off.

Daily Use Mode:

THREE LIGHT SETTINGS AVAILABLE:

High White Light/Strobe Light/Low White Light.

- **HIGH WHITE LIGHT:** Single click either side of the tail switch to access high white light.
- **STROBE LIGHT:** Quickly click either side of the tail switch twice to access strobe light. When you turn the strobe light off and turn on the light again, it will return to the high white light.
- **LOW WHITE LIGHT:** Quickly triple-click either side of the tail switch to access low white light. When you turn the low white light off and turn on the light again, it will return to the high white light.

NOTICE

Note: The time interval between successive presses of the switch is less than 0.5 seconds.

Tactical Mode:

MOMENTARY ON: Press and hold down either switch for momentary on. The light will stay on until the switch is released.

NO-HASSLE GUARANTEE

We'll do what it takes to keep your LumenTac gear running smoothly.

- LumenTac, Inc. warrants this product to be free from defects in workmanship and materials to the original purchaser (with proof of purchase) for one (1) year from the date of purchase.
- If you have any questions about this warranty or any other LumenTac product inquiries, please contact LumenTac Customer Service at support@lumentac.com.

www.lumentac.com

